


Supadek Technical Guide

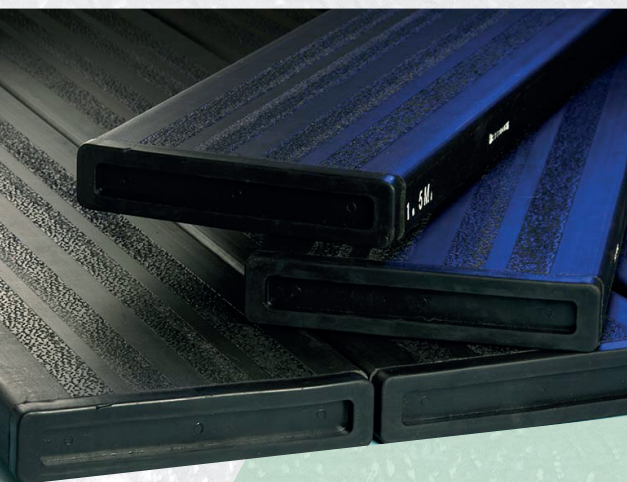

Supadek composite scaffold boards are manufactured by Tilon UK Ltd and quality assured to ISO9001:2015. The products are designed and tested in accordance with BS EN 12811 and provided they are used in accordance with their specified use, they will provide many years of service.

Outer skin	Mass per metre (Kg)	4.2*
UV stabilised TPR	Section width (mm)	225
Rubber	Section thickness (mm)	45
Inner core	Standard lengths (mm)	3900, 3000, 2400,
Glass fibre reinforced		1800, 1500, 1200,
Polypropylene		900, 600

General Description:

Product reference:

Manufacturer:

Overall thickness:

Overall weight per unit area:

Orientation (ribs):

End elevation of product:

Polypropylene reinforced with glass fibre chopped strands


Supadek

Tilon UK Limited

45mm

17kg/m²

Horizontal

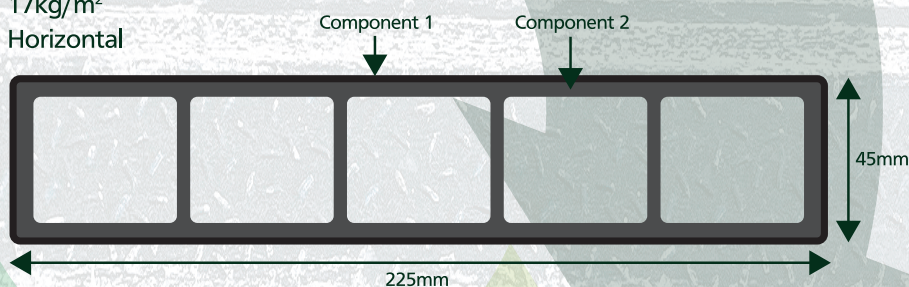

Component One:

Polypropylene Coating

Genetic type:

Density:

Thickness:

Colour:

Application method:

Polypropylene thermoplastic elastomer

0.95

800 microns

Black

Co-extrusion

Component Two:

Glass fibre reinforced
Polypropylene
Resin

Product reference:

Generic type:

Density:

Colour:

Recycled polypropylene

Polypropylene

0.95

Black

Component Two:

Glass fibre reinforced
Polypropylene
Glass reinforcement

Product reference:

Generic type:

Density:

Colour:

Chopped strand glass fibre

e-glass

2.54

Black